


**ASEDrive IIIe CL**  
**Contactless Smart Card Reader**  
**USB 2.0 Full Speed Interface**

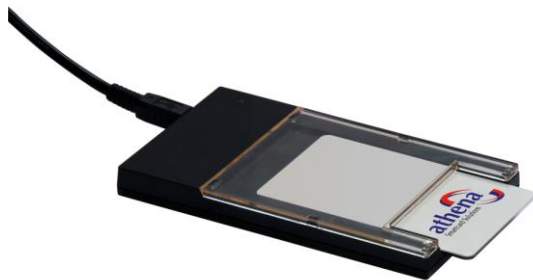

**Highlights**

- Support for contactless and dual interface smart cards.
- 13.56MHz
- ISO 14443 Type A&B
- PC/SC Interface.
- High-speed communication designed for Digital Signature and PKI systems.
- Upgradeable Flash Memory.

**Japan**

1-14-16, Motoyokoyama-cho  
Hachioji-shi  
Tokyo 192-0063  
Tel: +81 426 60 7555  
Fax: +81 426 60 7106

**US**

20380 Town Center Lane  
Suite 240  
Cupertino, CA 95014  
Sales & Support: +1 866 359 2273  
Fax: +1 408 608 1818

**Specifications**

Host Interface	<ul style="list-style-type: none"> <li>• Full speed USB (12 Mbps)</li> </ul>
Smart Card Interface	<ul style="list-style-type: none"> <li>• ISO/IEC 14443 A</li> <li>• ISO/IEC 14443 B</li> <li>• Baud Rate up to 848Kbps</li> <li>• Flash Upgradeable</li> </ul>
Cable	1.8 m with USB type A
Dimensions	<ul style="list-style-type: none"> <li>• Length – 124mm</li> <li>• Width – 75mm</li> <li>• Height – 10mm</li> </ul>
OS	<ul style="list-style-type: none"> <li>• Windows 2000, XP, Vista, 2003, MacOSX, Linux</li> </ul>
API	<ul style="list-style-type: none"> <li>• PC/SC</li> </ul>
Approval	<ul style="list-style-type: none"> <li>• FCC,CE</li> <li>• WEEE, RoHS</li> </ul>

Specifications are subject to change without notice.

All trademarks and trade names are property of their respective owners.

Copyright © 2008 Athena Smartcard Solutions Inc.